

ELECTRIC PRESSURE WASHER

Q-SERIES


Standard configuration

- Copper Cylinder Ceramic Plunger Crankshaft Connecting Rod Self-Priming Pump
- Powerful power with overload protection 4-stage motor
- Motor aluminum alloy shell 8mmx10M high pressure tube
- 4 quick connect nozzles (0°, 15°, 25°, 40°)
- The pressure is adjustable
- High-pressure spray gun with safety buckle
- Water hose and spray gun hook
- Water inlet pipes and their components
- Switch control box
- Stainless steel chassis
- Pressure gauge



Matching

- Voltage and power can be specified
- Turn off the gun and shut it down

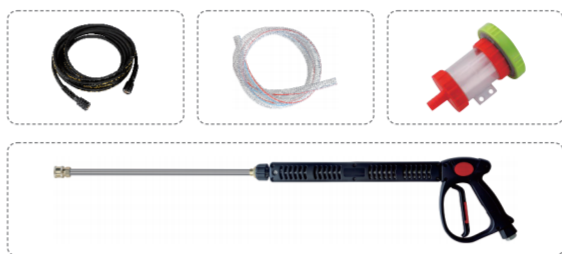

Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Carton Size
	Bar	PSI		L/MIN	KW				
QAB-1522	220	3200	15	5.5	7.5	380	1450	85	880x515x655
QAB-1525	250	3625	15	7.5	10.0	380	1450	90	880x515x655
QAA-1530	300	4350	15	10.0	14.0	380	1450	108	880x515x655
Q-2250	500	7250	22	22.0	30.0	380	1450	280	1240x830x970