


# ELECTRIC PRESSURE WASHER

S-SERIES

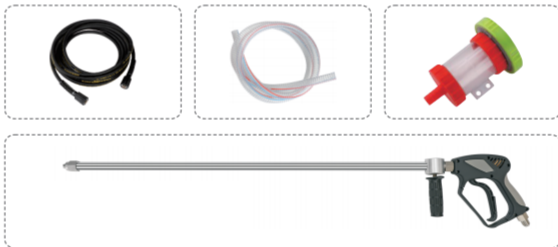

## Standard configuration

- Copper cylinder ceramic spraying plunger crankshaft connecting rod self-priming pump
- Powerful power with overload protection 4-stage motor
- Motor aluminum alloy shell 8mmx10M high pressure tube
- 4 quick connect nozzles (0°, 15°, 25°, 40°)
- The pressure is adjustable
- High-pressure spray gun with safety buckle
- Water hose and spray gun hook
- Water inlet pipes and their components
- Switch control box
- Stainless steel chassis
- Pressure gauge



## Matching

- Voltage and power can be specified

## Technical parameters

Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Carton Size
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG	MM
S-2360	600	8700	23	26.0	35.0	380	1450	300	1070X720X920