


# ELECTRIC PRESSURE WASHER

T-SERIES

## Standard configuration

- Copper Cylinder Ceramic Plunger Crankshaft Connecting Rod Self-Priming Pump
- Powerful power with overload protection 4-stage motor
- Motor aluminum alloy shell 8mmx10M high pressure tube
- 4 quick connect nozzles (0°, 15°, 25°, 40°)
- The pressure is adjustable
- High-pressure spray gun with safety buckle
- Water hose and spray gun hook
- Water inlet pipes and their components
- Switch control box
- Stainless steel chassis
- Pressure gauge

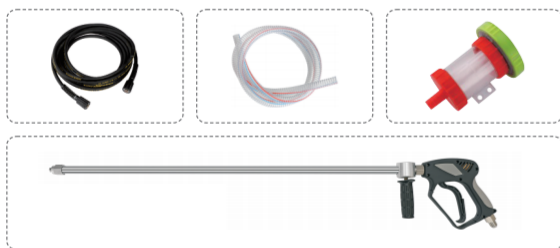

## Matching

- Voltage and power can be specified



Model	Working Pressure		Flow Rate	Power		Voltage	Speed	G.W.	Carton Size
	Bar	PSI	L/MIN	KW	HP	V	RPM	KG	MM
T-2135	350	5075	21	15.0	20.0	380	1450	210	1240x830x970
T-2250	500	7250	22	22.0	30.0	380	1450	280	1240x830x970

Model	Working Pressure		Flow Rate	Power	Speed	G.W.	Carton Size
	Bar	PSI	L/MIN		RPM	KG	MM
T-5020	200	2900	50	2V92 / 20.0HP	3600	210	1240X830X970
T-8015	150	2200	80	2V95 / 23.0HP	3600	280	1240X830X970