

# DIESEL FUEL HIGH-PRESSURE WASHER


## Standard configuration

- Copper Cylinder Ceramic Plunger Crankshaft Connecting Rod Self-Priming Pump
- Powerful power with overload protection 4-stage motor
- Motor aluminum alloy shell 8mmx10M high pressure tube
- 4 quick connect nozzles (0°, 15°, 25°, 40°)
- The pressure is adjustable
- High-pressure spray gun with safety buckle
- Water hose and spray gun hook
- Water inlet pipes and their components
- Switch control box
- Stainless steel chassis
- Pressure gauge



## Matching

- Voltage and power can be specified
- Turn off the gun and shut it down

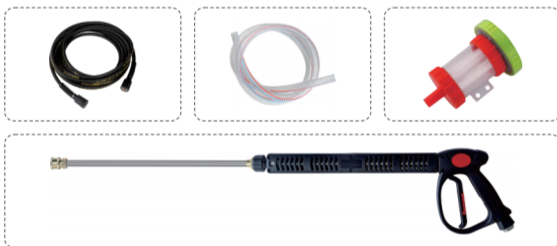

## Technical parameters

Model	Working Pressure		Flow Rate	Power	Speed	G.W.	Carton Size
	Bar	PSI	L/MIN		RPM	KG	MM
VCA-1520+	200	2900	18	173FE/4.0HP	3600	70	690X575X535
VAG-1825	250	3625	18	188FE/7.0HP	3600	100	810X630X660
V-3015	150	2200	30	192FE/9.0HP	3600	120	810X630X660