


GASOLINE DIESEL PIPE DREDGING

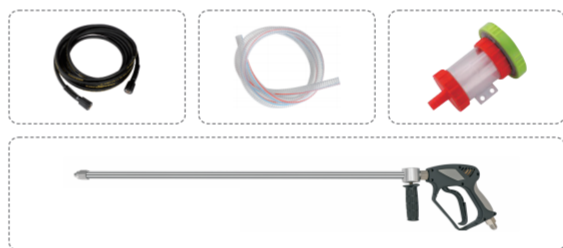

Standard configuration

- Copper cylinder ceramic spraying plunger crankshaft connecting rod self-priming pump
- Powerful power with overload protection 4-stage motor
- Motor aluminum alloy shell 8mmx10M high pressure tube
- 4 quick connect nozzles (0°, 15°, 25°, 40°)
- The pressure is adjustable
- High-pressure spray gun with safety buckle
- Water hose and spray gun hook
- Water inlet pipes and their components
- Switch control box
- Stainless steel chassis
- Pressure gauge

Technical parameters

Model	Working Pressure	Flow Rate	Power	Speed	G.W.	Carton Size
	Bar	L/MIN		RPM	KG	MM
W-1550	500	15	2V95/23.0HP	3600	280	1120x860x1000
W-8020	200	80	2V95/23.0HP	3600	280	1120x860x1000



Matching

- Voltage and power can be specified
- Turn off the gun and shut it down