


GASOLINE/DIESEL PRESSURE WASHER



36

Standard configuration

- High-performance electric-start gasoline/diesel engine
- Copper cylinder ceramic plunger diesel engine direct drive crankshaft connecting rod pump
- Electric start-8mmx10M high-pressure pipe
- 4 quick connect nozzles (0°, 15°, 25°, 40°)
- The pressure is adjustable
- High-pressure spray gun with safety buckle
- Water hose and spray gun hook
- Water inlet pipes and their components

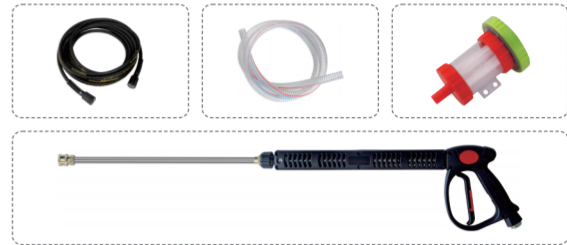

Technical parameters

Model	Working Pressure		Flow Rate	Power	Speed	G.W.	Carton Size
	Bar	PSI	L/MIN	HP	RPM	KG	MM
YCA-1715	150	2200	17	170FE/6.5HP	3600	80	1420X820X990
YAG-1825	250	3600	18	192FE/15.0HP	3600	100	1420X820X990
YAG-1825	250	3600	18	188FE/7.0HP	3600	110	1420X820X990